





ADA24R

ADA SERIES

FEATURES

PERFORMANCE

EXTERIOR

INTERIOR /


- 5.3 cubic feet overall capacity allows for storage of more than 7-1/2 cases of 12 oz beverages
- Touch pad digital control featuring easy view command center manages key functions and provides user alerts such as a door open alert
- Digital controlled single-zone convection cooling system provides a stable and consistent environment for optimum food and beverage storage
- Temperature setting from 34 to 45° F
- Sabbath / Blackout mode turns off all lighting, controls display and automatically resets after 36 hours
- Automatic defrost
- ENERGY STAR® / CEE Tier 3 rated
- UL residential and commercial listings
- 28-1/2" height meets ADA height requirement yet maximizes allowable space
- Four heavy duty chrome wire shelves
- Standard commercial stainless steel handle is interchangeable with professional handle option for stainless steel model
- Stainless steel wrap door with black end caps on stainless model must be ordered left or right hand hinged
- Solid black door is field reversible
- Black vinyl clad textured cabinet is more resistant to scratching, peeling and flaking
- Door lock standard on all models
- Unit can be built-in or freestanding providing a custom aesthetic
- Allow a 2-1/2" clearance on hinged side for 90° door opening when installed adjacent to a wall (for stainless steel model)
- Black model will accept a 1/4" insert panel to match with surrounding decor
- Allow 1/4" width overall for proper installation (see backside for details)
- No additional clearance around sides, top or rear of unit is needed for ventilation
- Durable, factory installed level legs provide a more precise undercounter fit
- Do not obstruct front grille air flow



Single Zone Convection Cooling System featured in ADA24R.





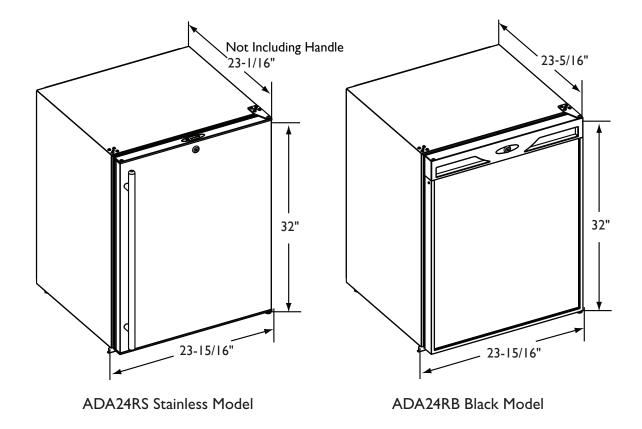

DIMENSIONS AND SPECIFICATIONS

OVERALL DIMENSIONS

Height 32" (81.3) Width 23-15/16" (60.9) 23-1/4" (59.0) Depth 24-15/16" (63.3) With stainless steel handle

CI .			
Shi	pping	weig	ht:
• • • • • • • • • • • • • • • • • • • •	PP9		

Solid Door Model 114 lbs (52 kg)

Running amps 2.4 Maximum start-up amps 9.8


Amps pertain to voltage rating 110/115 volt, 60 Hz

ENERGY STAR® and CEE Tier 3

Capacities:

Defrost technology Automatic Refrigerator volume 5.3 Cu. Ft Holds more than 7-1/2 cases of 12 oz canned beverages

ADA24R			
Stainless Right-hand	U-ADA24RS-13		
Stainless Left-hand	U-ADA24RS-15		
Black	U-ADA24RB-13		



Please visit www.u-line.com for installation guide.

All specifications are subject to change without notice.

